

# Technical Data Sheet

CODE 11126

## MF 90/3,5" T

Wall axial fans



### Certifications



IMQ



CE



IMQ Performance



CCC



EAC





G-Mark

### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,08	Voltage (V)	220-240
Absorbed Power max (W)	15	Weight (Kg)	0,50
Frequency (Hz)	50	Delivery max (l/s)	18
Insulation Class	II°	Delivery max (m <sup>3</sup> /h)	65
IP	X4	giri_minuto	2500
Max ambient temperature for continuous operation (°C)	50	Pressure max (mmH2O)	2,5
Nominal Diameter (mm)	90	Pressure max (Pa)	25
∅ Discharge Hole (mm)	92,5	RPM	2500
		Sound Pressure level Lp [dB (A)] 3m	28,8

### DIMENSIONS

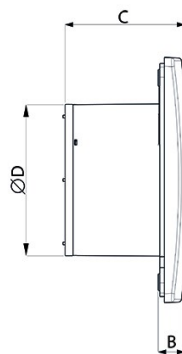

Size A (mm)	159
Size B (mm)	17
Size C (mm)	77
Size D (mm)	92,5

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

# Technical Data Sheet

CODE 11126

## MF 90/3,5" T


Wall axial fans




### DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 90 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 65 m<sup>3</sup>/h.
- Equipped with electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3').
- Non-return damper fitted to outlet port.
- IMQ SAFETY and IMQ PERFORMANCE certifications.
- Vortice speed controller.

### CURVES

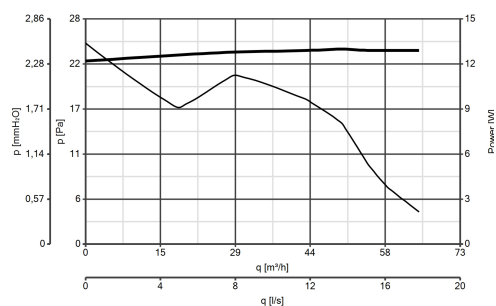

### ACCESSORIES



#### SF 90-100

Code 22162

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)