

Technical Data Sheet

CODE 11211

M 100/4" T

Wall/window axial fans



Certifications



IMQ



CE



IMQ Performance



CCC



EAC



G-Mark




UKCA

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Voltage (V)	230-240
Insulation class	II°	Weight (Kg)	0,6
IP	X4	Max airflow (l/s)	25
Max absorbed current (A)	0,1	Max airflow (m ³ /h)	90
Max absorbed power (W)	18	Max pressure (mmH2O)	3
Max ambient temperature for continuous operation (°C)	50	Max pressure (Pa)	29
Nominal diameter (mm)	100	RPM	2300
Ø Discharge hole (mm)	99	Sound pressure Lp [dB (A)] at 3 m	37,5

DIMENSIONS

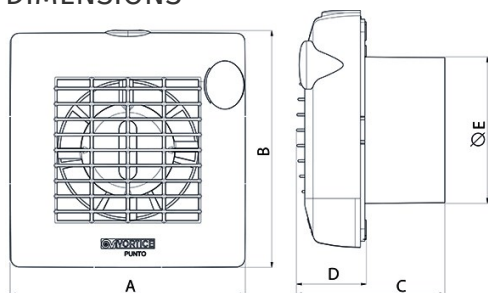

Size A (mm)	159
Size B (mm)	160
Size C (mm)	100
Size D (mm)	47
Size E (mm)	Ø 99

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11211

M 100/4" T


Wall/window axial fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 100 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 90 m³/h.
- Equipped with electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3').
- IMQ SAFETY and IMQ PERFORMANCE certifications.

CURVES

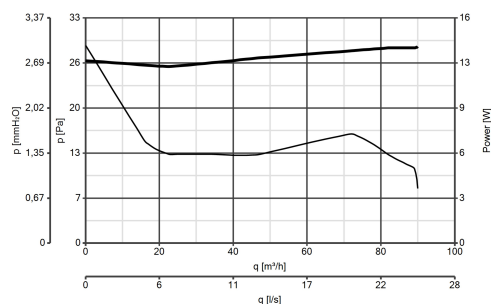

ACCESSORIES



S 100/4

Code 22154



F 100/4"

Code 22131

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com