

Technical Data Sheet

CODE 11333

MEX 120/5" LL 1S

Wall axial fans



Certifications



IMQ



CE



EAC



G-Mark




UKCA

TECHNICAL AND PERFORMANCE DATA

| | | | |
|-------------------------------------------------------|---------|-----------------------------------------------------------------------|-------|
| Frequency (Hz) | 50 | Weight (Kg) | 0,77 |
| Insulation class | II° | Max airflow at Max speed (l/s) | 48,6 |
| IP | 45 | Max airflow at Max speed (m ³ /h) | 175 |
| Max absorbed current at Max speed (A) | 0,095 | Max pressure at Max speed (mmH2O) | 5 |
| Max absorbed power at Max speed (W) | 13 | Max pressure at Max speed (Pa) | 49,04 |
| Max ambient temperature for continuous operation (°C) | 50 | Max RPM | 2075 |
| Nominal diameter (mm) | 120 | Sound power at Min speed LWA [dB(A)] | 52,8 |
| Voltage (V) | 220-240 | Sound pressure at 3m at Max speed calculated in free field Lp [dB(A)] | 32,3 |

DIMENSIONS

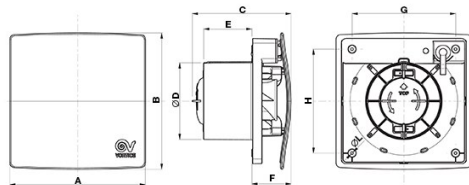

| | |
|-------------|-------|
| Size A (mm) | 193 |
| Size B (mm) | 193 |
| Size C (mm) | 138 |
| Size D (mm) | Ø 119 |
| Size E (mm) | 71 |
| Size F (mm) | 53 |
| Size G (mm) | 152 |
| Size H (mm) | 152 |
| Size L (mm) | Ø 3,5 |

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11333

MEX 120/5" LL 1S

Wall axial fans



DESCRIPTION

- Housings made of shockproof and UV resistant white ABS.
- Nominal diameter 120 mm.
- AC motor equipped with long-life ball-bearings, mixed-flow impellers made of PP resistant to aggressive substances.
- Maximum air flow 175 m³/h.
- Integrated butterfly back-draught shutter designed to prevent unwanted air inflows when the appliance is switched-off.
- Protection rating IP45, suitable for installation in Zone 1 of bathrooms, as defined by international standard IEC 60364-7.
- IMQ safety certification.

CURVES

□

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com