

Technical Data Sheet

CODE 11966

ARIETT LL T

Centrifugal duct fans



Certifications



IMQ



CE



IMQ Performance



EAC




UKCA

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Ø Discharge hole (mm)	97
Insulation class	II°	Voltage (V)	230
IP	X4	Weight (Kg)	1,47
Max absorbed current (A)	0,14	Max airflow (l/s)	19,4
Max absorbed power (W)	18	Max airflow (m ³ /h)	70
Max absorbed power at Max speed (W)	18	Max pressure (mmH2O)	12
Max ambient temperature for continuous operation (°C)	40	Max pressure (Pa)	118
Nominal diameter (mm)	100	RPM	2315
		Sound pressure Lp [dB (A)] at 3 m	40

DIMENSIONS

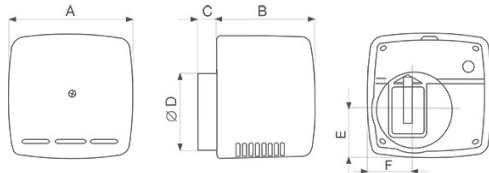

Size A (mm)	156
Size B (mm)	123
Size C (mm)	25
Size D (mm)	Ø 97
Size E (mm)	60
Size F (mm)	60

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11966

ARIETT LL T


Centrifugal duct fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter: 100 mm
- Motor with thermal overload protection and shaft turning in ball bearings.
- Maximum air flow 70 m³/h
- Equipped with electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3').
- Non-return damper fitted to outlet port.
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controller.

CURVES

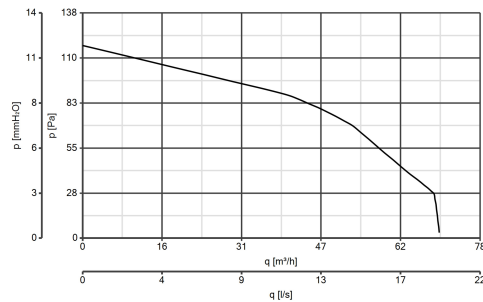

ACCESSORIES



DEVIATORE DI FLUSSO M 10/4

Code 22310

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com