

Technical Data Sheet

CODE 12615

VORTICE 150/6" AR-LL-S

Wall/window axial fans



Certifications



IMQ



CE



IMQ Performance



C Tick Mark



EAC




G-Mark

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,17	Voltage (V)	220-240
Absorbed Power max (W)	35	Weight (Kg)	2,07
Frequency (Hz)	50/60	Delivery max - Extract (l/s)	105,6
Inlet	Automatico	Delivery max - Extract (m3/h)	380
Insulation Class	II°	Delivery max - Intake (l/s)	59,7
IP	X4	Delivery max - Intake (m3/h)	215
Max absorbed Power at 60Hz (W)	35	Delivery max (m³/h)	380
Max ambient temperature for continuous operation (°C)	50	RPM	2110
Max ambient temperature for continuous operation 60Hz (°C)	50	Rpm - Exhaust	2110
Ø Discharge Hole (mm)	150	Rpm - Supply	2520
		Sound Pressure level Lp [dB (A)] 3m	49,6

DIMENSIONS

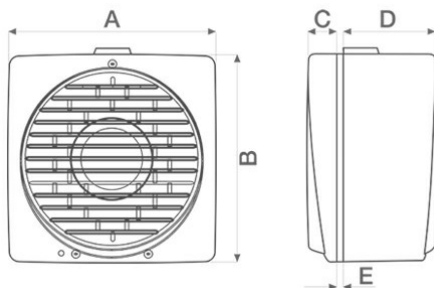

Ø glass hole	185/190
Ø wall hole	185/190
Size A (mm)	215
Size B (mm)	218
Size C (mm)	31
Size D (mm)	97,5
Size E (mm)	2/38

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 12615

VORTICE 150/6" AR-LL-S



Wall/window axial fans




DESCRIPTION

- Model designed for window/wall mounted installation.
- Reversibility function (intake or extraction).
- Automatic shutter: prevents the entry of cold air and bad smells when the appliance is switched off.
- Material: UV resistant ABS plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings, coupled to screw type thermoplastic impeller with wing profile blades.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

CURVES

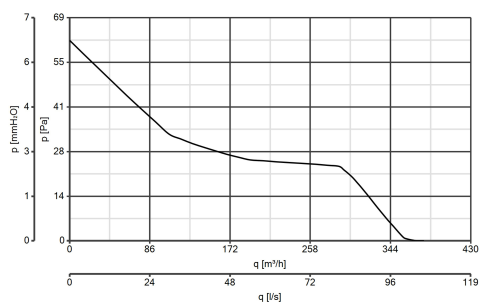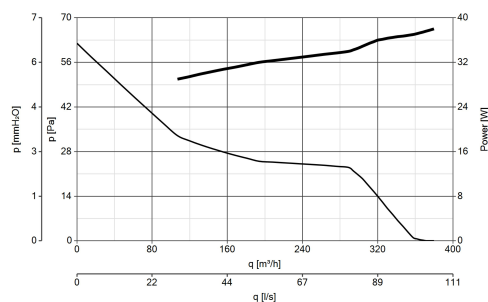

ACCESSORIES



KIT TE 150/6"
(TORRETTO)
Code 13001



KIT MU (MURO)
Code 13018



KIT VV 150/6"
(DOPPI VETRI)
Code 13021



KIT FF 150/6"
(DOPPIA FINESTRA)
Code 13024

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com