

Technical Data Sheet

CODE 15072

TORRETTA TRT 70 E 6P

Centrifugal roof fans with horizontal discharge



Certifications


CE CE

EAC EAC

TECHNICAL AND PERFORMANCE DATA

| | | | |
|---|------|-------------------------------------|------|
| Absorbed Current max (A) | 1,30 | Number of Poles | 6 |
| Absorbed Power max (W) | 600 | Voltage (V) | 400 |
| Frequency (Hz) | 50 | Weight (Kg) | 80 |
| Insulation Class | I° | Delivery max (l/s) | 1944 |
| Max ambient temperature for continuous operation (°C) | 90 | Delivery max (m³/h) | 7000 |
| Motor IP protection | 55 | Pressure max (mmH2O) | 38 |
| Nominal Diameter (mm) | 400 | Pressure max (Pa) | 373 |
| Number of Phases (Ph) | 3 | RPM | 950 |
| | | Sound Pressure level Lp [dB (A)] 3m | 74 |

DIMENSIONS

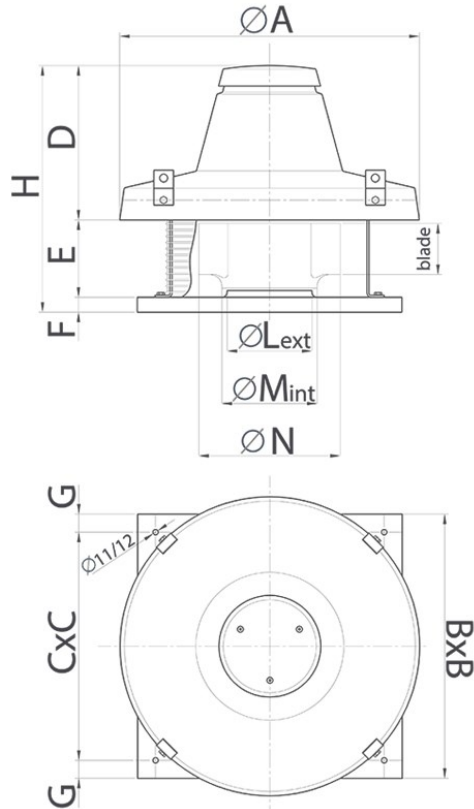

| | |
|-------------|-------|
| Size A (mm) | 1015 |
| Size B (mm) | 830 |
| Size C (mm) | 750 |
| Size D (mm) | 449 |
| Size E (mm) | 283 |
| Size F (mm) | 38 |
| Size G (mm) | 40 |
| Size H (mm) | 770 |
| Size L (mm) | Ø |
| | 365 |
| Size M (mm) | Ø 375 |
| Size N (mm) | Ø |
| | 564 |

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 15072

TORRETTA TRT 70 E 6P

Centrifugal roof fans with horizontal discharge



DESCRIPTION

- Base manufactured from phosphated pressed steel, epoxy powder coated with hammered effect finish, guaranteeing long-term resistance to atmospheric agents.
- Aerodynamically contoured inlet port for optimum performance, fashioned as a single unit with the base and gauged to optimize air flow.
- Pressed steel motor cover: pickled and phosphated surface, polyester powder coated and oven baked finish, colour grey, with hammered texture.
- Accident prevention and anti-bird grilles (to UNI ISO 13857 standard), consisting of electrically welded steel rings with epoxy powder coated finish, colour black.
- Centrifugal impeller with self-cleaning backward curved steel blades, hot-dip galvanized and dynamically balanced (UNI ISO 1940, Point 1 – Class 6.3), and splined aluminium hub.
- 1 speed three phase AC motor, insulation class F, with shaft turning in double shielded ball bearings.
- Maximum airflow: 7000 m³/h
- Motor and fan designed for operation in ambient temperatures higher than 65 °C.
- Cooling fan for better dissipation of heat
- Galvanized steel eye lugs for transport and lifting/handling operations.
- Cable guaranteeing continuity of earth connection.
- Steel safety wire for anchoring the appliance once installed.
- Vortice speed controller.

ACCESSORIES




IRT 35

Code 12924



IRET 6

Code 12934



TR-G 70/100


(GRIGLIA DI PROTEZIONE)

Code 22506



TR-B 70/100
(BOCCAGLIO
ASPIRAZIONE)

Code 22508



TR-CU 70/100
(CONTROTELAIO
DI BASE U)

Code 22539



IRET INVERTER
2,5 M

Code 12816

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com