

# Technical Data Sheet

CODE 16203

## CA 150 ES

Energy saving in-line centrifugal fans




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Airflow at 1st speed (l/s)	28
Insulation class	II°	Airflow at 1st speed (m³/h)	100
IP	44	Max airflow at Max speed (l/s)	222
Max ambient temperature for continuous operation (°C)	50	Max airflow at Max speed (m³/h)	800
Nominal current at Max speed (A)	1	Max pressure at Max speed (mmH2O)	50
Nominal current at Min speed (A)	0,05	Max pressure at Max speed (Pa)	490
Nominal diameter (mm)	150	Max RPM	2250
Nominal power at Max speed (W)	120	Min RPM	300
Nominal power at Min speed (W)	3	Pressure at 1st speed (mmH2O)	0,7
Voltage (V)	220-240	Pressure at 1st speed (Pa)	7
Weight (Kg)	6,1	Sound pressure at 3m at Max speed calculated in free field Lp [dB(A)]	48,1

### DIMENSIONS

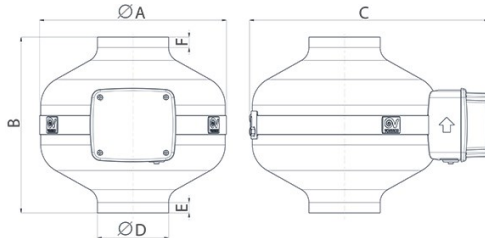

Size A (mm)	Ø 347
Size B (mm)	275
Size C (mm)	422
Size D (mm)	Ø 147
Size E (mm)	17
Size F (mm)	17

#### PER INFORMAZIONI:

**Servizio al Cliente:** tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

**Pre & Post Vendita:** fax +39 02 90699302

**Email prevendita:** prevendita@vortice-italy.com

# Technical Data Sheet

CODE 16203

## CA 150 ES


Energy saving in-line centrifugal fans



### DESCRIPTION

- Pickled and phosphated steel housing with polyester powder-coated finish, resistant against aggressive atmospheric agents.
- Nominal diameter: 150 mm
- High efficiency ES (brushless) motor coupled to a backward impeller.
- Possibility of connection to remote sensors.
- Zinc-coated steel brackets for wall mounting, supplied as standard.
- A dedicated dip-switch allows to choose:
  - o 2 speed product functioning, settable during the installation and adjustable through optional two-speed switch,
  - o 1 speed product functioning, adjustable through 0-10V signal potentiometer (supplied as optional).

### CURVES

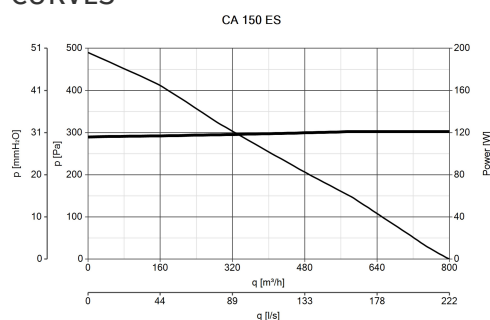

### ACCESSORIES



#### POT

Code 12828



#### POT-IT

Code 12826



#### C PIR

Code 12998



#### C TIMER

Code 12999



#### CA-MU (STAFFE DI SOSTEGNO)

Code 22674



#### DUO

Code 22914



#### C TEMP

Code 12992



#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

**PROTEZIONE)**

Code 22760