

Technical Data Sheet

CODE 40301

E 254 M ATEX II 2G/D H
T3/125°C X GB/DB



Axial plate-mounted fans for installation in potentially explosive areas



Certifications


CE  ATEX-CE

 EAC

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,75	Number of Poles	4
Absorbed Power max (W)	167	Number of speeds	1
Frequency (Hz)	50	Voltage (V)	230
Insulation Class	I°	Weight (Kg)	8,0
IP	65	Delivery max (l/s)	288,9
Max ambient temperature for continuous operation (°C)	+ 40	Delivery max (m³/h)	1040
Min ambient temperature for continuous operation (°C)	- 20	Pressure max (mmH2O)	8,9
Nominal Diameter (mm)	250	Pressure max (Pa)	87,5
Number of Phases (Ph)	1	RPM	1400
		Sound Pressure level Lp [dB (A)] 3m	63,2

DIMENSIONS

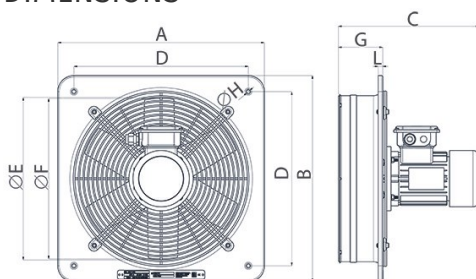

Diametro \emptyset (mm)	250
Size A (mm)	320
Size B (mm)	320
Size C (mm)	305
Size D (mm)	280
Size E (mm)	256
Size F (mm)	250
Size G (mm)	95
Size H (mm)	8
Size L (mm)	10
Size M (mm)	274
Size N (mm)	264

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 40301

**E 254 M ATEX II 2G/D H
T3/125°C X GB/DB**




Axial plate-mounted fans for installation in potentially explosive areas

DESCRIPTION

- Nominal diameter 250 mm
- Frame with port and grille made of pressed steel, pickled and phosphated, and treated initially with epoxy base coat; thereafter, grey textured finish obtained by applying a coat of polyurethane powder paint strengthened by oven baking.
- 1 speed asynchronous single phase AC motor with shaft turning in double shielded ball bearings, size to UNEL MEC standard, flange B35, manufactured employing methods and materials suitable for use in environments with potentially explosive atmospheres, according to Explosion Protection standards EN ISO 80079-36:2016; EN 14986:2017.
- Maximum air flow 1,040 m³/h
- Impeller with aluminium hub and blades of glass fibre reinforced anti-static nylon.
- Aluminium cooling fan.
- Pressed steel motor cover.
- Metal cable glands for electrical connection.
- IMQ-certified for use in areas at risk of explosion due to presence of gas and dust:
- IMQ 10 ATEX 029 X; GR II cat. 2G/D h T3/125 X

CURVES

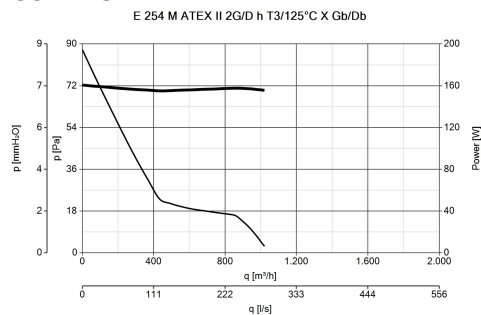

ACCESSORIES



GV2 ME05

Code 21114

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com