


# Slim concealed ceiling unit


## Slim design for flexible installation

- › Optimised design for R-32 refrigerant
- › 10 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices, etc.
- › Compact dimensions, can easily be mounted in a ceiling void of only 240mm


SERIE A (15, 20, 25, 32)

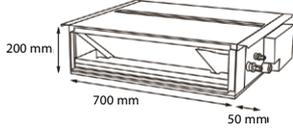

- › Medium external static pressure up to 44Pa facilitates unit use with flexible ducts of varying lengths
- › Discretely concealed in the wall: only the suction and discharge grilles are visible
- › Optional auto cleaning filter option ensures maximum efficiency, comfort and reliability by regular filter cleaning
- › Flexible installation, as the air suction direction can be altered from rear to bottom suction

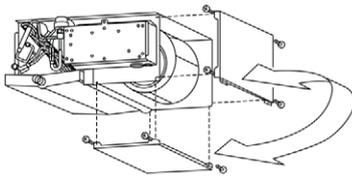

- › Standard drain pump with 600mm lift increases flexibility and installation speed


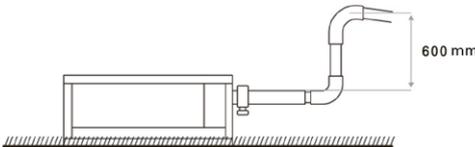


Access all technical information on FXDA-A at [my.daikin.eu](http://my.daikin.eu) or click here



Access all technical information on BAE20A at [my.daikin.eu](http://my.daikin.eu) or click here

NEW

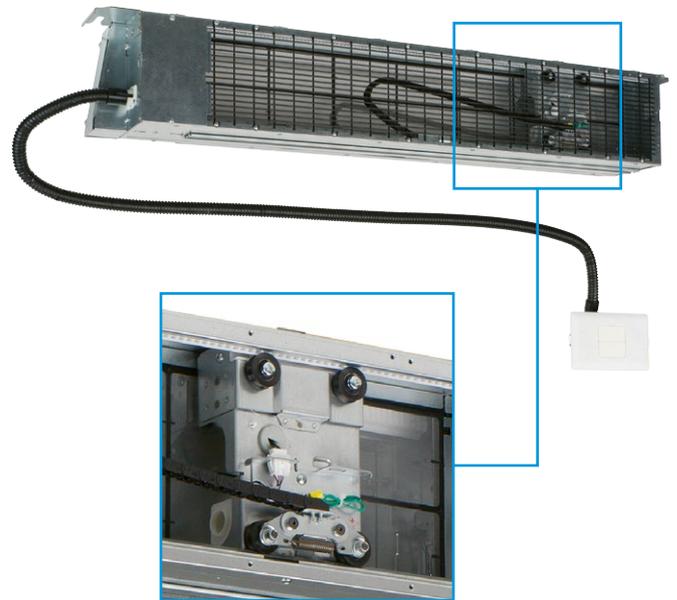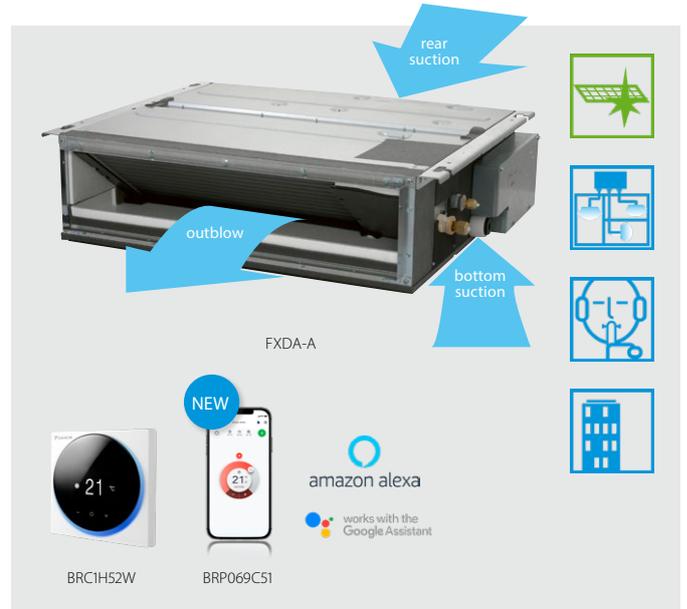

Auto cleaning filter option

Indoor unit			FXDA	10A	15A	20A	25A	32A	40A	50A	63A	
Cooling capacity	Total capacity	At high fan speed	kW	1.10	1.70	2.20	2.80	3.60	4.50	5.60	7.10	
Heating capacity	Total capacity	At high fan speed	kW	1.30	1.90	2.50	3.20	4.00	5.00	6.30	8.00	
Power input - 50Hz	Cooling	At high fan speed	kW	0.042	0.057		0.068		0.075	0.096	0.107	
	Heating	At high fan speed	kW	0.042	0.057		0.068		0.075	0.096	0.107	
Required ceiling void >			mm	240								
Dimensions	Unit	HeightxWidthxDepth	mm	200x750x620				200x950x620		200x1,150x620		
Weight	Unit		kg	22.0				26.0		29.0		
Casing	Material			Galvanised steel								
Fan	Air flow rate - 50Hz	Cooling	At high fan speed	m <sup>3</sup> /min	5.2	6.5		8.0	10.5	12.5	16.5	
	External static pressure - 50Hz	Factory set/High pressure		Pa	10/30.0				15/44.0			
Air filter	Type			Removable / washable								
Sound power level	Cooling	At high fan speed	dBA	48	50	51		52	53	54		
	Cooling	Low/Medium/High fan speed	dBA	26 / 28 / 29	27.0/31.0/32.0	27.0/31.0/33.0		28.0/32.0/34.0	29.0/33.0/35.0	30.0/34.0/36.0		
Refrigerant	Type/GWP			R-32 / 675								
Piping connections	Liquid	OD	mm	6.35								
	Gas	OD	mm	9.52				12.7				
	Drain			VP20 (I.D. 20/O.D. 26)								
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/60/220-240/220								
Current - 50Hz	Maximum fuse amps (MFA)		A	6								
Control systems	Infrared remote control			BRC4C65 / BRC4C66 (1)								
	Wired remote control			BRC1H52W/S/K								

(1) Must be combined with Madoka wired remote controller.