




Racire: A++ SEER: 6.1

Incalzire: A+ SCOP: 4



R32

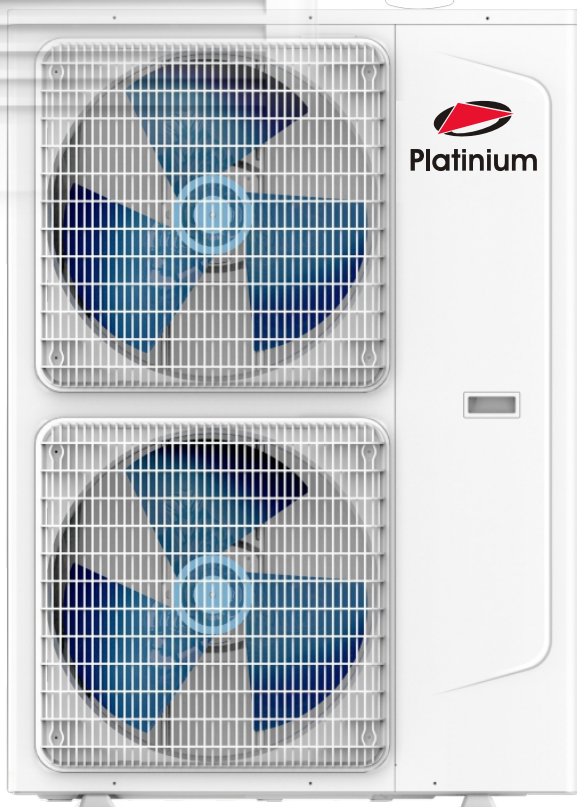

Model			PCOL-52R32+++
Capacitate racire	kW		R32 15.1(6.5-15.5)
Capacitate incalzire	kW		15.2(5-16)
SEER			6.1
Clasa energetica pt racire			A++
SCOP			4
Clasa energetica pt incalzire			A+
Consum anual	Racire	kWh/a	866
	Incalzire	kWh/a	5320
Capacitate dezumidificare	L/h		5,2
Nivel zgomot U. Interioara (Turbo-Hi-Mid-Low-Si)	dB(A)		66
Nivel zgomot U. Exterioara	dB(A)		69
Date electrice			
Alimentare			380-415V~/50Hz/3P
Curent de operare	Racire	A	9(2.5-10)
Curent de operare	Incalzire	A	8(2-9.5)
Putere consumata nominala	Racire	kW	5.35
Putere consumata nominala	Incalzire	kW	4.5
Curent maxim de intrare		A	14
Putere consumata maxima		kW	9
Sistemul frigorific			
Refrigerant/Incarcare Kg			R32/3
Compresor	Tip		Rotativ GMCC - Toshiba
Volum aer interior (Hi-Mid-Low-Si)	m3/h		2100/1870/1720/1570
Volum aer exterior	m3/h		9000
Dispozitiv de expansiune		tip	VALVA
Tevi Conexiune	Gaz	Inches	3/4"
	Lichid	Inches	3/8"
Altele			
Aria aplicabila		m ²	70~150
Lungime masima traseu		m	25
Diferenta max de inaltime		m	6
Telecomanda			Cu infrarosu
Temperatura ambient (Racire / Incalzire)	Exterior	°C	Rac :0-48/ Inc : -15~24
	Interior	°C	Rac: 18~32/Inc:0~27
Dimensiuni nete (W x H x D)	Interior	mm	580×1925×400
	Exterior	mm	940×1320×340
Greutate neta	Interior	kg	52
	Exterior	kg	94