


Specification-Free Match

Model	Indoor		AUCO-H09/4DR3HA	AUCO-H12/4DR3HA	AUCO-H18/4DR3HA
Capacity	Cooling	Btu/h	8872(5120-12115)	12285(5800-12625)	16036(8530-16378)
		kW	2.60(1.50-3.55)	3.50(1.70-3.70)	4.70(2.50-4.80)
	Heating	Btu/h	9560(5120-12115)	12625(5120-12625)	17060(8530-19107)
		kW	2.80(1.50-3.55)	3.50(1.50-3.70)	5.0(2.50-5.6)
Electric Data	Power Supply	V~,Hz,Ph	220-240,50,1	220-240,50,1	220-240,50,1
	Cooling Power Input	W	40(20-65)	40(20-65)	55(20-80)
	Heating Power Input	W	40(20-65)	40(20-65)	55(20-80)
Performance	Air Volume	m3/h	600/530/430	600/530/430	650/550/450
	Sound Pressure Noise Level	dB(A)	42/39/36	42/39/36	44/40/37
	Sound Power Noise Level	dB(A)	52	52	54
Dimension	Net Dim (W*D*H)	mm	700×225×600	700×225×600	700×225×600
	Packing Dim(W*D*H)	mm	780×300×675	780×300×675	780×300×675
Weight	Net/Gross	kg	15/19	15/19	15/19
Pipe Dia	Liquid Side	mm(inch)	6.35(1/4)	6.35(1/4)	6.35(1/4)
	Gas Side	mm(inch)	9.52(3/8)	9.52(3/8)	9.52(3/8)
	Drainage	mm	20	20	20
Loading Qty	20/40/40H	unit	198/411/462	198/411/462	198/411/462

Remark: The above designs and specifications are subject to change of product improvement without prior notice.

Dimension

AUCO-H09/4DR3HA AUCO-H12/4DR3HA AUCO-H18/4DR3HA

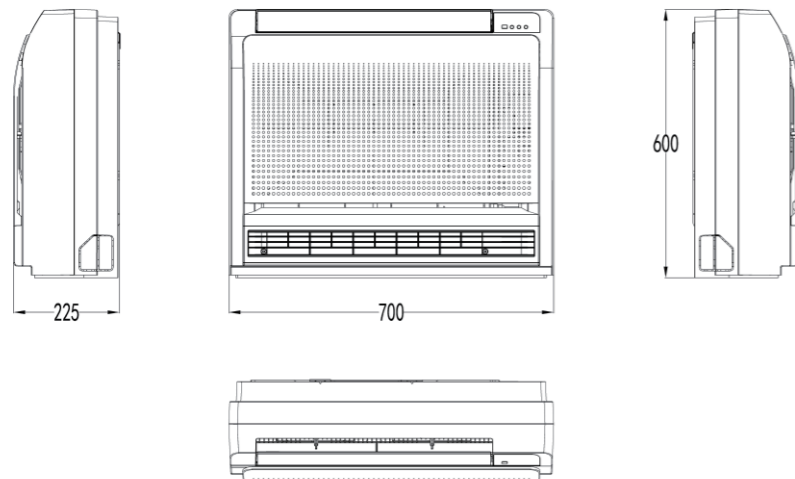

Specification-Light Commercial

Sale Model	Indoor		AUCO-H12/4DR3HA	AUCO-H18/4DR3HA
	Outdoor		AL-H12/NDR3HB2(U)	AL-H18/NDR3HB2(U)
IDU Power Supply		V~,Hz,Ph	220-240/50&60/1	220-240/50&60/1
Capacity	Cooling	Btu/h	12000(4600-15000)	16036(5200-19100)
		KW	3.50(1.35-4.40)	4.70(1.53-5.60)
	Heating	Btu/h	12000 (4200-18100)	17060(4800-21200)
		KW	3.50(1.24-5.30)	5.00(1.40-6.20)
Electric Data	Rated Cooling Power Input	KW	1.03(0.26 ~ 1.60)	1.45(0.47 ~ 2.30)
	Rated Heating Power Input	KW	0.94(0.19 ~ 1.51)	1.34(0.46 ~ 2.25)
	Rated Cooling Current	A	4.48(1.13 ~ 6.96)	6.30(2.04 ~ 10.00)
	Rated Heating Current	A	4.09(0.83 ~ 6.57)	5.83(2.00 ~ 9.78)
Performance	EER/COP	W/W	3.40/3.72	3.24/3.73
	SEER/SCOP	W/W	6.1/4.0	6.1/4.0
Indoor Unit	Air Flow Volume	m3/h	600/530/430	650/550/450
		CFM	353/312/253	382/324/265
	Sound Pressure Noise	dB(A)	42/39/36	44/40/37
	Sound Power Noise Level	dB(A)	52	56
	Net Dimension (W*D*H)	mm	700×225×600	700×225×600
	Packing Dimension (W*D*H)	mm	780×300×675	780×300×675
Refrigerant Pipe	Net/Gross Weight	Kg	15/19	15/19
	Liquid Side	mm	6.35(1/4)	6.35(1/4)
	Gas Side	mm	12.7(1/2)	12.7(1/2)
	Drainage	mm	R3/4in(DN20)	R3/4in(DN20)
Wired/Remote Controller			YKR-L/300-HYE	YKR-L/300-HYE
St μ f f i n g Quantity	20/40/40H	Set	90/188/205	75/154/189

- Parameters above are all measured when the connecting pipe is 5 meters.
- Parameters above may be modified as product improvement. We keep the right to change the product specifications without prior notice, please take the parameters listed on the nameplate as criterion

Dimension

AUCO-H12/4DR3HA AUCO-H18/4DR3HA

