

MSZ-AY / MSZ-AP R32

Elegance Wall Mounted System

Inverter Heat Pump

Mseries

The **MSZ-AY & MSZ-AP** wall mounted systems deliver excellent flexibility and energy efficiency for air conditioning projects.

The range benefits from a stylish design, air purifying properties and a range of capacities from 1.5kW to 7.1kW. With connection capability to single as well as multi-split systems, the Elegance series is a great fit for residential and light commercial applications.

R32

Key Features & Benefits:

- Elegant and sleek design to complement multiple application types
- High seasonal efficiencies, offering energy savings and low running costs
- Low noise levels, including Night Mode setting, for minimal disturbance to occupants
- In-room air purification through advanced V-Blocking filter, neutralising bacteria, viruses, allergens, dust and mould
- Luxury Matt finish ensures easy cleaning and consistent premium appearance (MSZ-AY only)
- Self-cleaning mode prevents mould and odours, allowing cleaner air to be delivered to the space (MSZ-AY only)
- Dual-Barrier coating on the heat exchanger, fan and air duct prevents dust and grease accumulation within the unit, ensuring long-term efficient operation (MSZ-AY only)
- Built-in Wi-Fi interface enables system control and monitoring via the Mitsubishi Electric MELCloud app; plus voice control - compatible with Amazon Alexa and Google Assistant-enabled devices



Air Conditioning Product Information

MSZ-AY / MSZ-AP R32 Elegance Wall Mounted System Inverter Heat Pump

R32




MSZ-AY15-20VGK MSZ-AY25-50VGK MSZ-AP60-71VGK MUZ-AY20/25/35/42VG MUZ-AY50VG & MUZ-AP60VG MUZ-AP71VK2

MSZ-AP / MSZ-AY INDOOR UNITS		MSZ-AY15VGK	MSZ-AY20VGK	MSZ-AY25VGK	MSZ-AY35VGK	MSZ-AY42VGK	MSZ-AY50VGK	MSZ-AP60VGK	MSZ-AP71VGK
CAPACITY (kW)	Heating (nominal)	1.6	1.9	3.2 (1.0-4.1)	4.0 (1.3-4.6)	5.2 (1.3-6.0)	5.5 (1.4-7.3)	6.8 (2.0-8.6)	8.0 (2.2-10.3)
	Cooling (nominal)	1.7	1.9	2.5 (0.9-3.4)	3.5 (1.1-3.8)	4.2 (0.9-4.5)	5.0 (1.4-5.4)	6.1 (1.4-7.3)	7.1 (2.0-8.7)
	Heating (UK)	1.4	1.6	2.64 (0.8-3.4)	3.3 (1.1-3.8)	4.45 (1.1-4.9)	4.78 (1.2-6.0)	5.6 (1.6-7.1)	6.68 (1.8-8.6)
	Cooling (UK)	1.7	1.9	2.48 (0.9-3.4)	3.47 (1.1-3.8)	4.17 (0.9-4.5)	4.95 (1.4-5.3)	6.05 (1.4-7.2)	7.04 (2.0-8.6)
SHF (nominal)		0.86	0.8	0.92	0.88	0.77	0.74	0.83	0.77
COP / EER (nominal)		4.00/4.05	4.17/4.35	4.10 / 4.17	3.88 / 3.54	3.74 / 3.23	3.74 / 3.24	4.07 / 3.84	3.82 / 3.53
SCOP / SEER (BS EN14825)		4.0/7.2	5.2/8.6	4.80 / 8.70	4.70 / 8.70	4.70 / 7.90	4.70 / 7.50	4.60 / 7.40	4.40 / 7.20
ErP ENERGY EFFICIENCY CLASS	Heating/Cooling	A+/A++	A+/A+++	A++ / A+++	A++ / A+++	A++ / A++	A++ / A++	A++ / A++	A+ / A++
AIRFLOW (l/s)	Heating - SL0-Lo-Mid-Hi-SHI	47-65-75-90-102	47-65-75-90-118	67-83-110-133-197	67-83-110-133-197	73-90-116-143-215	80-95-121-151-215	180-223-257-290-338	170-192-220-255-320
	Cooling - SL0-Lo-Mid-Hi-SHI	47-62-73-87-102	47-62-73-87-110	60-83-105-130-175	60-83-105-130-185	75-95-116-140-175	86-106-125-151-195	157-183-220-267-315	160-192-220-255-310
PIPE SIZE mm (in)	Gas	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	12.7 (1/2")	12.7 (1/2")
	Liquid	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")
SOUND PRESSURE LEVEL (dBA)	Heating - SL0-Lo-Mid-Hi-SHI	19-26-30-35-40	19-26-30-35-42	18-24-34-39-45	18-24-31-38-45	21-29-35-40-45	28-33-38-43-48	30-37-41-45-48	30-37-41-45-51
	Cooling - SL0-Lo-Mid-Hi-SHI	19-26-30-35-40	19-26-30-35-42	18-24-30-36-42	18-24-30-36-42	21-29-34-38-42	28-33-36-40-44	30-37-41-45-48	30-37-41-45-49
SOUND POWER LEVEL (dBA)		54	57	57	57	57	58	65	65
DIMENSIONS (mm)	Width x Depth x Height	760 x 199 x 250	760 x 199 x 250	798 x 245 x 299	798 x 245 x 299	798 x 245 x 299	798 x 245 x 299	1100 x 257 x 325	1100 x 257 x 325
WEIGHT (kg)		8.9	8.9	10.5	10.5	10.5	10.5	16	17
ELECTRICAL SUPPLY		230V, 50Hz	230V/ 50Hz	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6	6	6	6	6	6	6	6
INTERCONNECTING CABLE No. CORES		4	4	4	4	4	4	4	4

MUZ-AP / MUZ-AY OUTDOOR UNITS		MULTI-SPLIT ONLY	MUZ-AY20VG	MUZ-AY25VG	MUZ-AY35VG	MUZ-AY42VG	MUZ-AY50VG	MUZ-AP60VG	MUZ-AP71VK2
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	-	48 / 47	48 / 47	50 / 49	51 / 50	52 / 52	57 / 56	55 / 55
	Cooling	-	59	59	61	61	64	65	65
SOUND POWER LEVEL (dBA)		-	31	27	28.5	34	40.5	40	53
WEIGHT (kg)		-	800 x 285 x 550	800 x 285 x 550	800 x 285 x 550	800 x 285 x 550	800 x 285 x 714	800 x 285 x 714	840 x 330 x 880
DIMENSIONS (mm)	Width x Depth x Height	-	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
ELECTRICAL SUPPLY		-	Single	Single	Single	Single	Single	Single	Single
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	-	0.60 / 0.46	0.78 / 0.60	1.03 / 0.99	1.39 / 1.30	1.47 / 1.54	1.67 / 1.59	2.12 / 2.01
	Heating/Cooling (UK)	-	0.52 / 0.38	0.70 / 0.50	0.93 / 0.83	1.25 / 1.08	1.32 / 1.28	1.51 / 1.33	1.91 / 1.68
STARTING CURRENT (A)		-	3.2	3.6	4.7	6.1	6.9	7.4	9.3
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	-	3.2 / 2.6 [7.0]	3.6 / 2.9 [7.06]	4.7 / 4.5 [8.46]	6.1 / 5.8 [9.9]	6.5 / 6.9 [13.8]	7.4 / 7.1 [14.0]	9.3 / 8.8 [16.4]
FUSE RATING (BS88) - HRC (A)		-	10	10	10	10	16	16	20
MAINS CABLE No. CORES		-	3	3	3	3	3	3	3
MAX PIPE LENGTH (m)		-	20	20	20	20	20	30	30
MAX HEIGHT DIFFERENCE (m)		-	12	12	12	12	12	15	15
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675) - 7m		-	0.55 / 0.38	0.55 / 0.37	0.55 / 0.37	0.70 / 0.47	1.00 / 0.68	1.05 / 0.71	1.50 / 1.02
MAX ADDITIONAL REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675)		-	0.26 / 0.18	0.25 / 0.18	0.26 / 0.18	0.26 / 0.18	0.26 / 0.18	0.30 / 0.21	0.30 / 0.21

DIMENSIONS

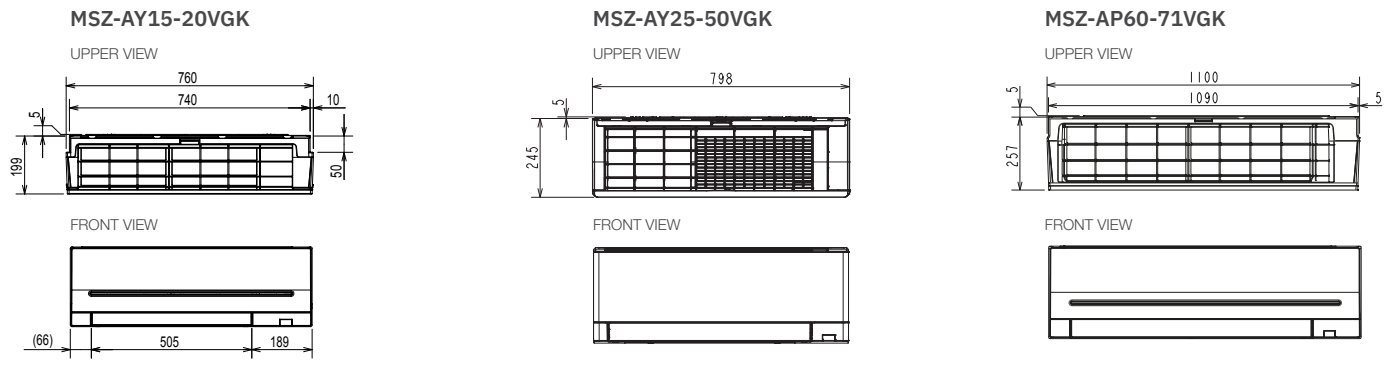

Telephone: 01707 282880
email: air.conditioning@meuk.mee.co.uk
les.mitsubishielectric.co.uk



UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880 Fax: 01707 278881
IRELAND Mitsubishi Electric Europe, Westgate Business Park, Ballymount, Dublin 24, Ireland. Telephone: (01) 419 8800 Fax: (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Italy - Turkey - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2024. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R290 (GWP:3), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R454C (GWP:148), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).

Effective as of January 2024

